



B Sries

Part No.	Nominal dc spark-over voltage	Gas Discharge Tube dc spark-over voltage	Impulse spark-over voltage at 1kV/ μ s		DC Holdover voltage	Nominal impulse discharge current 8/20 μ s	Nominal impulse discharge current 10/1000 μ s	Nominal Alternating discharge current at 50Hz, 1s	Insulation resistance		Capacitance at 1kHz			
	V_{sdc} (V)	V_{sdc} (V)	V_{si} (V)		V_h (V)				i_{di} (KA)	i_{di} (A)	i_{da} (A)	V (V)	R_{is} ()	C (pF)
			100V/ μ s	1kV/ μ s										
B75	75	60~90	700	800	52	10	100	10	50	10^9	3			
B90	90	72~108	600	700	52									
B150	150	120~180	600	700	52									
B230	230	184~276	700	800	80									
B250	250	200~300	700	800	80									
B300	300	240~360	800	900	135									
B350	350	280~420	800	900	135									
B400	400	320~480	900	1000	135									
B420	420	336~504	1000	1100	135									
B470	470	376~564	1100	1200	135									
B600	600	480~720	1300	1500	150									


72B Type




72BL Type




72BLSF Type




80BL Type




72BT Type




72BLPF Type

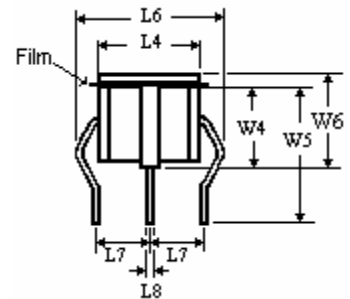


B SERIES




72B Type




72BL Type




72BLSF Type



80BL Type



72BT Type



72BLPF Type

Type	W4	W5	W6	L4	L6	L7	L8
72B	8.0±0.5	----	----	10.0±0.5	----	----	----
72BL	8.0±0.5	15.0±0.5	----	10.0±0.5	13.4 ₋₂	4.4±0.5	1.0±0.1
72BLSF	7.0±0.5	15.0±0.5	9.8±0.5	10.0±0.5	13.4 ₋₂	4.4±0.5	1.0±0.1
72BLPF	7.0±0.5	15.0±0.5	9.8±0.5	10.0±0.5	13.4 ₋₂	4.4±0.5	1.0±0.1
72BT	8.0±0.5	17.4±1.0	----	10.0±0.5	41.6±2.0	4.4±0.5	1.0±0.1
80BL	8.0±0.5	14.6±0.5	----	10.0±0.5	----	----	1.0±0.1